REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

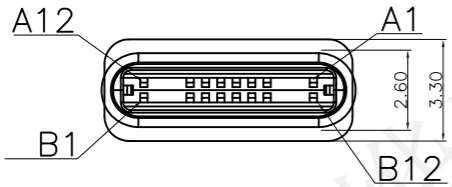

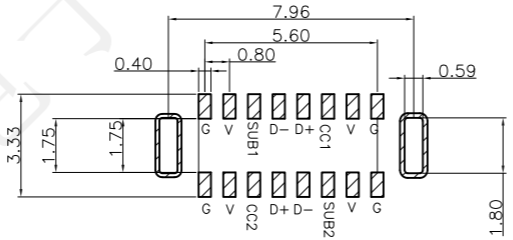

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

1.ELECTRICAL:
CURRENT:3A
CONTACT RESISTANCE:40 MILLIOHMS MAX
DIELECTRIC WITHSTANDING VOLTAGE: 200V AC
INSULATION RESISTANCE:100 MEGOHMS MIN
2.MECHANICAL:
MATING FORCE:5-20N
WITHDRAWAL FORCE:5-20N
DURBILITY:10000 CYCLES
3.ENVIRONMENTAL:
TEMPERTURE RANGE -40℃~105℃
SALT TESTING:48 HOURS

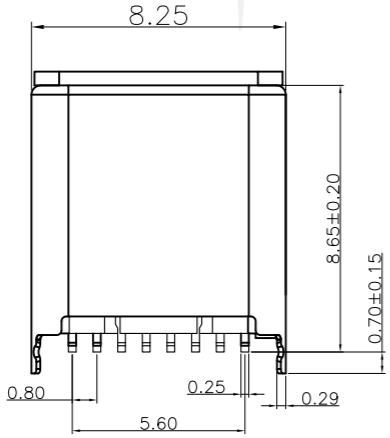

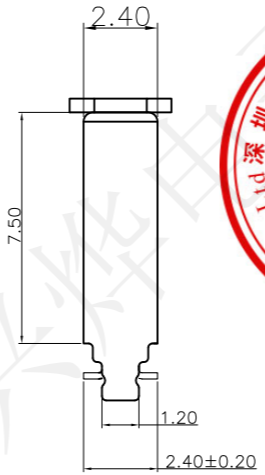

深圳市兴烨电子有限公司 工程部专用章 APPROVED Xingye Technology Co.,Ltd

受 控 文 件



NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
7				
6				
5				
4	PLASTIC	LCP	BLACK	UL 94V-0
3	Latch	SUS301	——	NI Plated
2	TERMINAL	C5191-H	——	Gold Plated
1	SHELL	SUS201	——	Ni Plated

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE			
X.X	±0.30	X.°	±2°
.XX	±0.20	.X°	±1°
.XXX	±0.10	.XX°	±0.5°
UNITS		mm	

APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞

Series Name :

Product Name :
TYPE-CF-16P立贴公头LCP黑胶双排+后塞H7.5

Part N0: UCZ27500

SCALE	SHEET	REV.
1:1	1/1	A1