


受控文件

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

序号	品名	材质
①	0.5-nP翻盖H1.0编带	LCP UL94V-0 本色
②	0.5-nP翻盖H1.0编带	铜合金/表面镀金
③	0.5-nP翻盖H1.0编带	LCP UL94V-0 黑色
④	0.5-nP翻盖H1.0编带	铜合金/表面镀锡

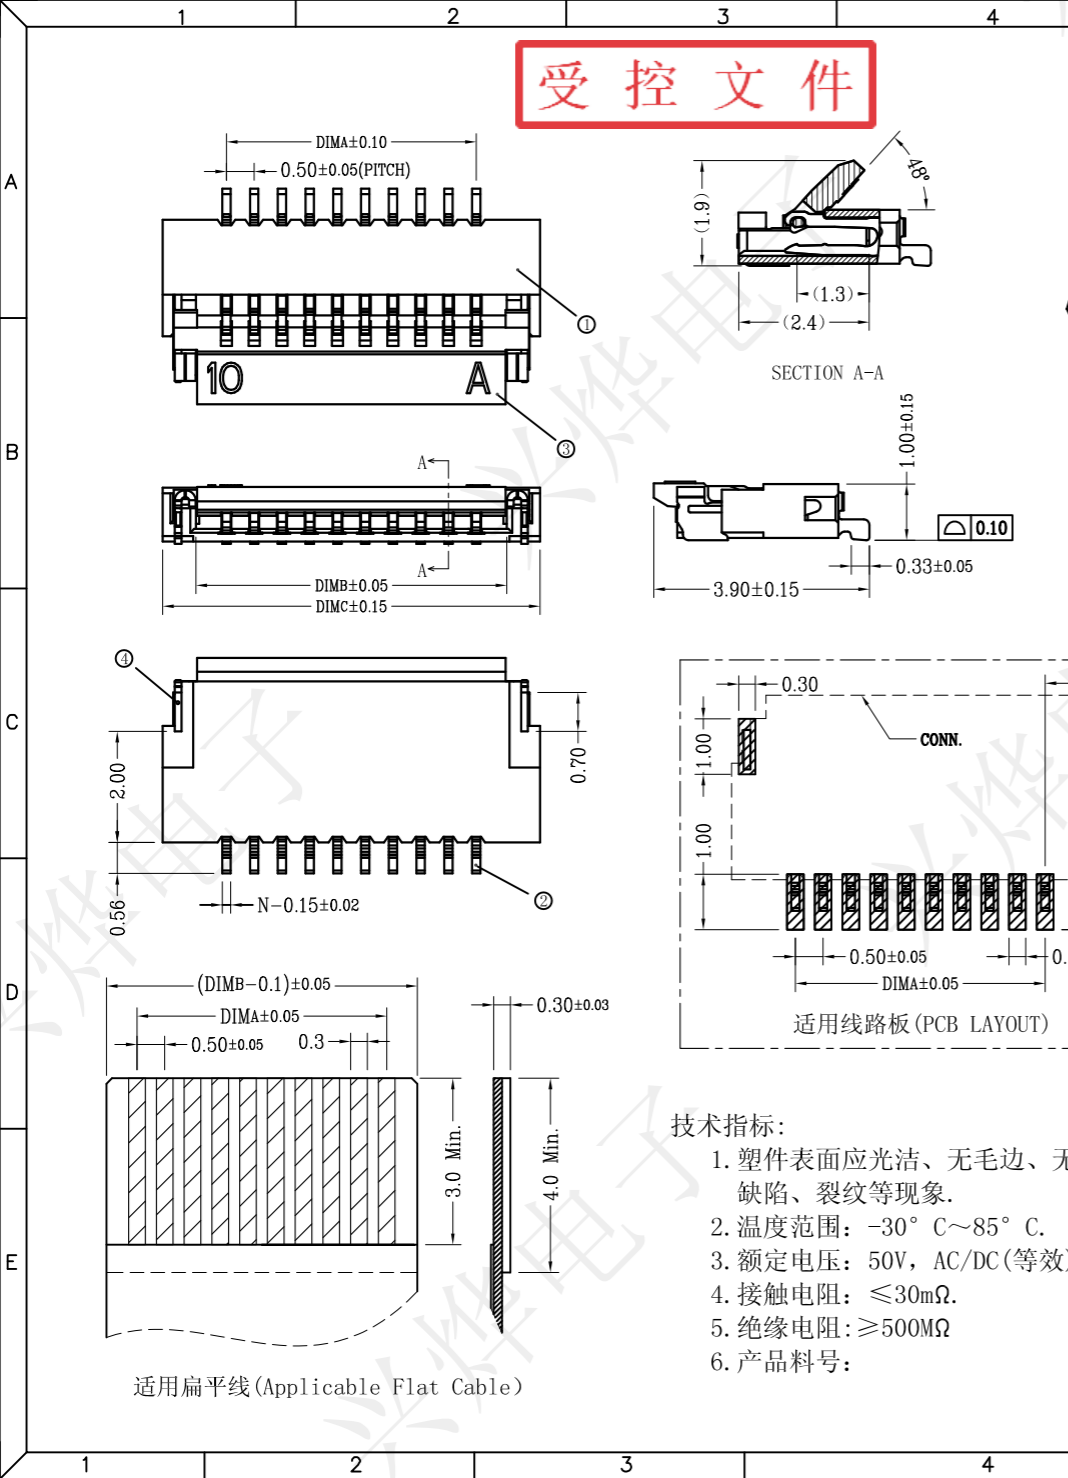

CKTS	料号	尺寸			CKTS	料号	尺寸		
		A	B	C			A	B	C
4P	FCW24039	1.5	2.6	3.8	28P	FCW24063	13.5	14.6	15.8
5P	FCW24040	2.0	3.1	4.3	29P	FCW24064	14.0	15.1	16.3
6P	FCW24041	2.5	3.6	4.8	30P	FCW24065	14.5	15.6	16.8
7P	FCW24042	3.0	4.1	5.3	31P	FCW24066	15.0	16.1	17.3
8P	FCW24043	3.5	4.6	5.8	32P	FCW24067	15.5	16.6	17.8
9P	FCW24044	4.0	5.1	6.3	33P	FCW24068	16.0	17.1	18.3
10P	FCW24045	4.5	5.6	6.8	34P	FCW24069	16.5	17.6	18.8
11P	FCW24046	5.0	6.1	7.3	35P	FCW24070	17.0	18.1	19.3
12P	FCW24047	5.5	6.6	7.8	36P	FCW24071	17.5	18.6	19.8
13P	FCW24048	6.0	7.1	8.3	37P	FCW24072	18.0	19.1	20.3
14P	FCW24049	6.5	7.6	8.8	38P	FCW24073	18.5	19.6	20.8
15P	FCW24050	7.0	8.1	9.3	39P	FCW24074	19.0	20.1	21.3
16P	FCW24051	7.5	8.6	9.8	40P	FCW24075	19.5	20.6	21.8
17P	FCW24052	8.0	9.1	10.3	41P	FCW24076	20.0	21.1	22.3
18P	FCW24053	8.5	9.6	10.8	42P	FCW24077	20.5	21.6	22.8
19P	FCW24054	9.0	10.1	11.3	43P	FCW24078	21.0	22.1	23.3
20P	FCW24055	9.5	10.6	11.8	44P	FCW24079	21.5	22.6	23.8
21P	FCW24056	10.0	11.1	12.3	45P	FCW24080	22.0	23.1	24.3
22P	FCW24057	10.5	11.6	12.8	46P	FCW24081	22.5	23.6	24.8
23P	FCW24058	11.0	12.1	13.3	47P	FCW24082	23.0	24.1	25.3
24P	FCW24059	11.5	12.6	13.8	48P	FCW24083	23.5	24.6	25.8
25P	FCW24060	12.0	13.1	14.3	49P	FCW24084	24.0	25.1	26.3
26P	FCW24061	12.5	13.6	14.8	50P	FCW24085	24.5	25.6	26.8
27P	FCW24062	13.0	14.1	15.3					

- 技术指标:
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
 2. 温度范围: -30° C~85° C.
 3. 额定电压: 50V, AC/DC(等效).
 4. 接触电阻: ≤30mΩ.
 5. 绝缘电阻: ≥500MΩ
 6. 产品料号:

深圳市兴烨电子有限公司
Shenzhen XingYe Electronics co., Ltd

Series Name :
0.5-nP翻盖镀金H1.0编带

TOLERANCE		
.XX ±0.30	.X° ±2°	APPD: 陈爱光
.XX ±0.20	.X° ±1°	CHED: 施立敏
.XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞
UNITS	mm	

Product Description :

Part NO:

SCALE	SHEET	REV.
1:1	1/1	A1

适用扁平线 (Applicable Flat Cable)