

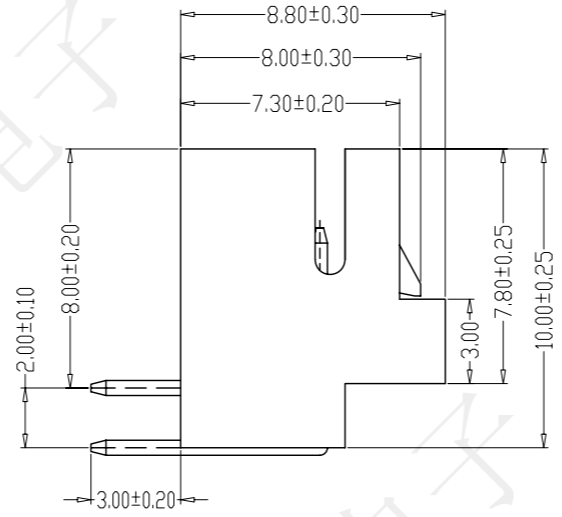
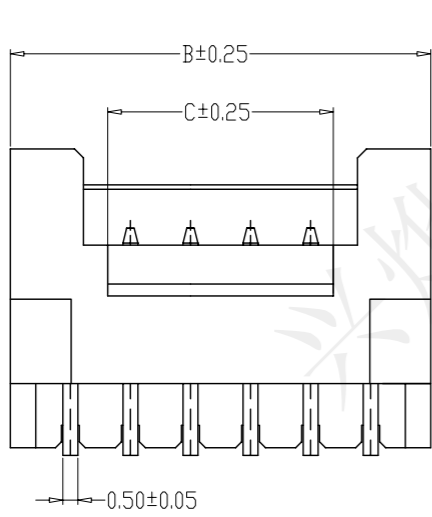


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				



Operating temperature:-25℃~85℃  
 Rated loading:3A 250V AC,DC  
 Contact resistance:20mΩ Max  
 Insulation resistance:1000MΩ Min  
 Withstanding voltage:AC 800V (50HZ)/min  
 Material: PA46, UL94V-0  
 PIN brass Tin-plated

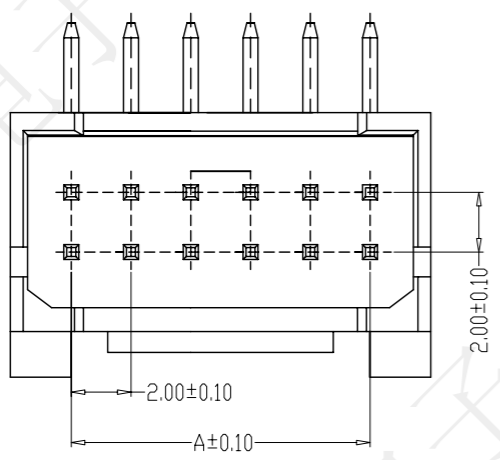

PCB LAYOUT



受控文件

CKTS	料号	尺寸		
		A	B	C
PHB-2*2AW	CZB15361	2.00	6.00	3.00
PHB-2*3AW	CZB15362	4.00	8.00	3.00
PHB-2*4AW	CZB15363	6.00	10.00	3.00
PHB-2*5AW	CZB15364	8.00	12.00	5.00
PHB-2*6AW	CZB15365	10.00	14.00	7.00
PHB-2*7AW	CZB15366	12.00	16.00	9.00
PHB-2*8AW	CZB15367	14.00	18.00	11.00
PHB-2*9AW	CZB15368	16.00	20.00	13.00
PHB-2*10AW	CZB15369	18.00	22.00	15.00
PHB-2*11AW	CZB15370	20.00	24.00	17.00
PHB-2*12AW	CZB15371	22.00	26.00	19.00
PHB-2*13AW	CZB15372	24.00	28.00	21.00
PHB-2*14AW	CZB15373	26.00	30.00	23.00
PHB-2*15AW	CZB15389	28.00	32.00	25.00
PHB-2*22AW	CZB15374	42.00	46.00	39.00

深圳市兴烨电子有限公司  
 Shenzhen XingYe Electronics co., Ltd

Series Name : PHB-2\*nAW

Product Name :

TOLERANCE		
XX ±0.30	X° ±2°	APPD: 陈爱光
.XX ±0.20	x° ±1°	CHEd: 施立敏
.XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞
UNITS	mm	

Part NO:

	SCALE	SHEET	REV.
	1:1	1/1	A1