

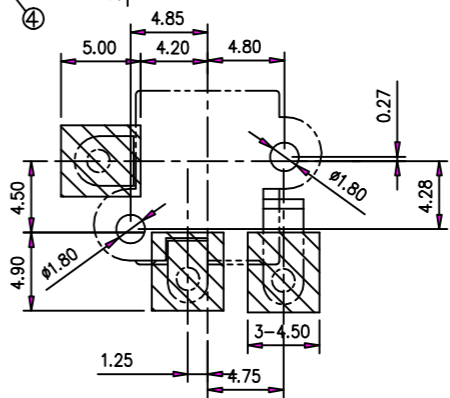

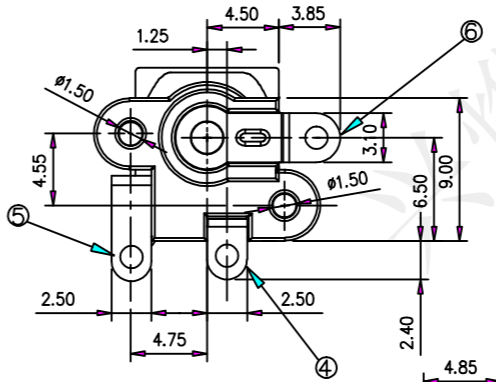
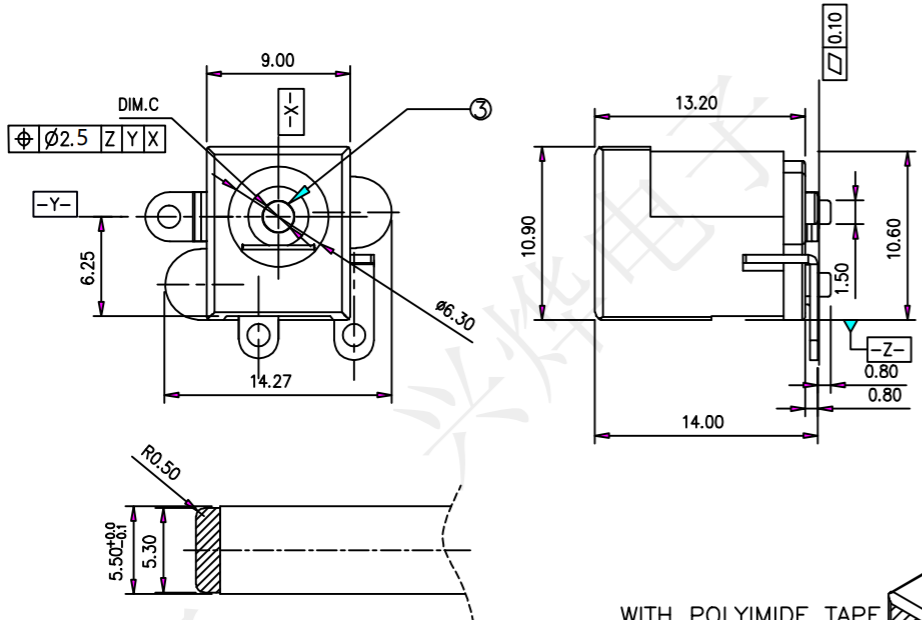


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

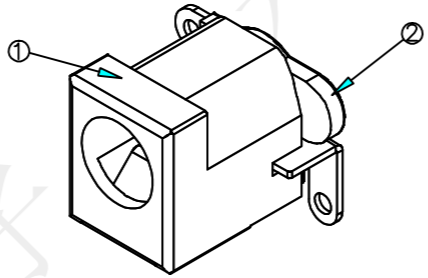

RECOMMENDED PADS LAYOUT <TOP VIEW>  
NOTE : TOLERANCE FOR PCB LAYOUT IS ± 0.05

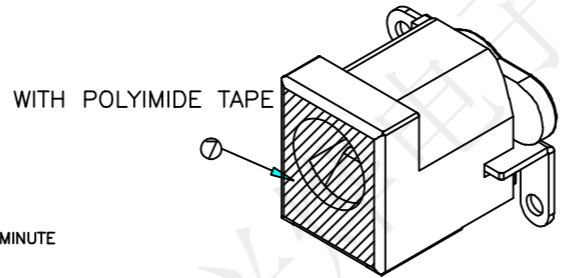

- NOTES:
- ELECTRICAL CHARACTERISTICS:
    - 1-1 RATED CURRENT: 4A
    - 1-2.RATED VOLTAGE: 20V .
    - 1-3. INSULATION RESISTANCE: 100MΩ MIN. AFTER BY 500VDC FOR 1 MINUTE
    - 1-4. DIELECTRIC WITHSTANDING VOLTAGE: 5000V AC FOR 1 MINUTE.
    - 1-5 CONTACT RESISTANCE: 30mΩ MAX.
  - MECHANICAL CHARACTERISTICS:
    - 2-1. PLUG INSERTION FORCE : 0.8~2.0KGS .
    - 2-2. PLUG WITHDRAWAL FORCE : 0.8~2.0KGS .
  - TEMPERATURE RISE CAN'T EXCEED 30°C MAX
  - DURABILITY TEST: 5,000 CYCLES .
  - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
  - SOLDERING HEAT RESISTANCE REFLOW SOLDERING 260C.
  - PLUG INTERFACE DIMENSIONS CONFORM TO EIAJ RC-5325 SPECc.

ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY	NOTE
⑦	POLYIMIDE TAPE			1	
⑥	PIN TERMINAL	BRASS	Ag	1	
⑤	SHUNT TERMINAL	BRASS	Ag	1	
④	SPRING TERMINAL	PBS	Ag	1	
③	CENTER PIN	COPPER	NI	1	
②	BOTTOM COVER	PA10T		1	BLACK
①	P1_HOUSING	LCP	UL94V-0	1	BLACK



受控文件

		Series Name :	
深圳市兴烨电子有限公司 Shenzhen XingYe Electronics co., Ltd		Product Name :	
		DC-005T 立贴 2.5针	
		Part NO:	
		DCF19028	
TOLERANCE X.X ±0.30 X.* ± 2* .XX ±0.20 .X* ± 1* .XXX ±0.10 .XX* ±0.5* UNITS mm		APPD: 陈爱光 CHED: 施立敏 DRAW: 马洪飞	SCALE SHEET REV. 1:1 1/1 A1