

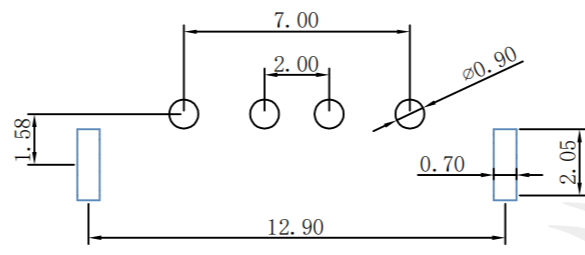
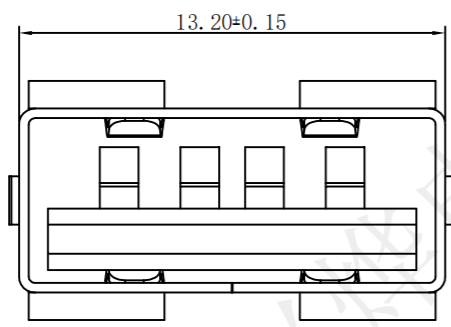


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

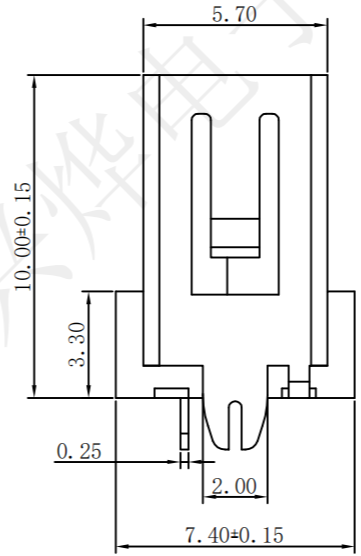

PCB LAYOUT

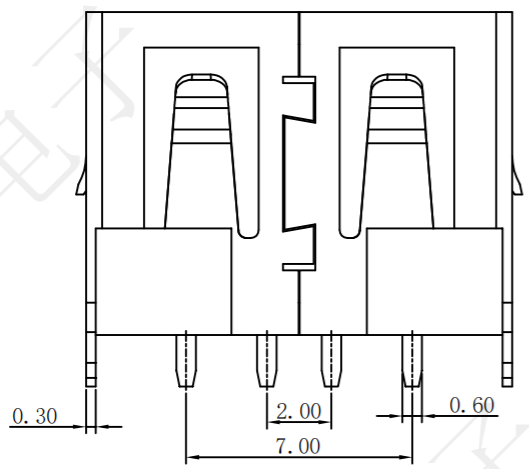

受控文件

Specification:
 Current rating: DC 1.5A 30V
 Dielectric withstanding voltage: 500 V(ac) for 1 min.
 Contact resistance: 30 mΩ Max.
 Insulation resistance: 100 MΩ Min.
 Total mating force: 3.57 Kgf Max.
 Total unmating force: 1.0 Kgf Min.
 Temperature range: -30°C~80°C

3	Shell	1PCS	copper alloy	t=0.3mm
2	Contacts	4PCS	copper alloy	t=0.25mm
1	Housing	1PCS	PA9T	blue/UL94v-0
No.	Pare Name	Number	Material	Remarks

深圳市兴烨电子有限公司
 ShenZhen XingYe Electronics co., Ltd

TOLERANCE		APPD: 陈爱光 CHED: 施立敏 DRAW: 马洪飞
X.X ±0.30	X.° ±2°	
.XX ±0.20	.X° ±1°	
.XXX ±0.10	.XX° ±0.5°	
UNITS	mm	

Series Name :		
Product Description : AF180度短体10.0平口铜蓝胶耐温 无卤盐雾48H		
Part NO: USBL48006		
SCALE	SHEET	REV.
1:1	1/1	A1