


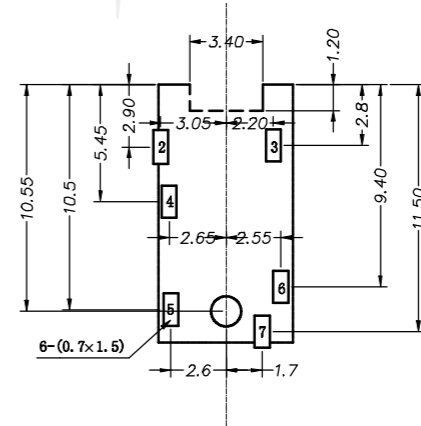






REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

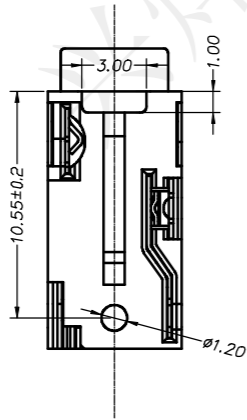


- CONTACT CURRENT RATING: 0.5A.
- CONTACT RESISTANCE: 30 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30-20N
- CONNECTOR UNMATING FORCES: 30-20N
- Temperature range: -30° C~70° C



P. C. B LAYOUT TOP VIEW



受控文件



7	PJ-342-07	4#开关脚	1	磷铜	0.20T	镀金
6	PJ-342-06	4#弹片脚	1	磷铜	0.20T	镀金
5	PJ-342-05	3#开关脚	1	磷铜	0.20T	镀金
4	PJ-342-04	3#脚	1	磷铜	0.20T	镀金
3	PJ-342-03	2#脚	1	磷铜	0.20T	镀金
2	PJ-342-02	盖脚	1	磷铜	0.20T	镀金
1	PJ-342-01	底座	1	PPA		黑色
序号	产品编号	产品名称	数量	材料	规格	处理

		TOLERANCE	
		X.X ±0.30	X.° ±2°
XX ±0.20	.X.° ±1°	APPD: 陈爱光	
XXX ±0.10	.XX° ±0.5°	CHED: 施立敏	
UNITS	mm	DRAW: 马洪飞	

Series Name :		
Product Name :		
PJ-342E有头脚1.8		
Part NO:		
PJL11023		
SCALE	SHEET	REV.
1:1	1/1	A1