





REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

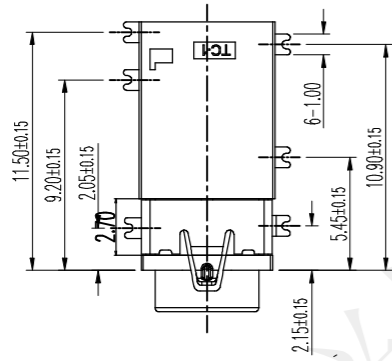

3D VIEW



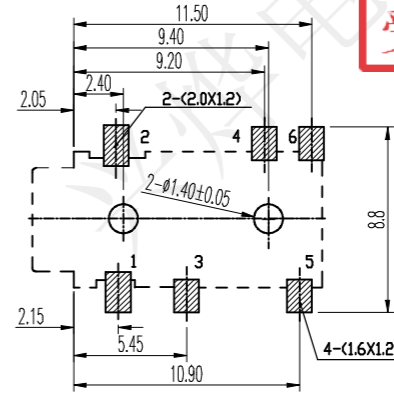


P.C.B LAYOUT
TOP VIEW



SCHEMATIC

受控文件

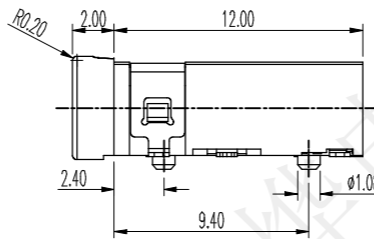

SPECIFICATION:
 Operating temperature: -30°C~70°C
 Rated loading: DC 30V 1.0A
 Contact resistance: 50mΩ Max
 Insulation resistance: 100MΩ Min
 Withstanding voltage: AC 500V (50Hz) /min
 Insertion force: 3-30N
 Pullout force: 3-30N
 Life: 5000 CYCLES

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
7	HOUSING	1	PA9T COLOR BLACK	
6	TERMINAL 6#	1	BRASS; NICKEL(40u*MIN.) UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA	T=0.20mm
5	TERMINAL 5#	1	BRASS; NICKEL(40u*MIN.) UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA	T=0.20mm
4	TERMINAL 4#	1	STAINLESS STEEL; NICKEL(40u*MIN.)UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
3	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL(40u*MIN.)UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
2	TERMINAL 2#	1	PHOSPHOR BRONZE; NICKEL(40u*MIN.) UNDER PLATING OVERALL,GOLD FLASH PLATING OVERALL;	T=0.20mm
1	TERMINAL 1#	1	PHOSPHOR BRONZE; NICKEL(40u*MIN.) UNDER PLATING OVERALL,GOLD FLASH PLATING OVERALL;	T=0.20mm

深圳市兴烨电子有限公司 Shenzhen XingYe Electronics co., Ltd		Series Name :							
		Product Name : PJ-342B镀金							
TOLERANCE		Part NO: PJL11003							
X.X ±0.30	X.° ±2°	APPD: 陈爱光	<table border="1"> <tr> <th>SCALE</th> <th>SHEET</th> <th>REV.</th> </tr> <tr> <td>1:1</td> <td>1/1</td> <td>A1</td> </tr> </table>	SCALE	SHEET	REV.	1:1	1/1	A1
SCALE	SHEET	REV.							
1:1	1/1	A1							
.XX ±0.20	.X° ±1°	CHED: 施立敏							
.XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞							
UNITS	mm								

Series Name :	
Product Name : PJ-342B镀金	
Part NO: PJL11003	
SCALE	SHEET
1:1	1/1
REV.	A1