RoHS
REACH
HF

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

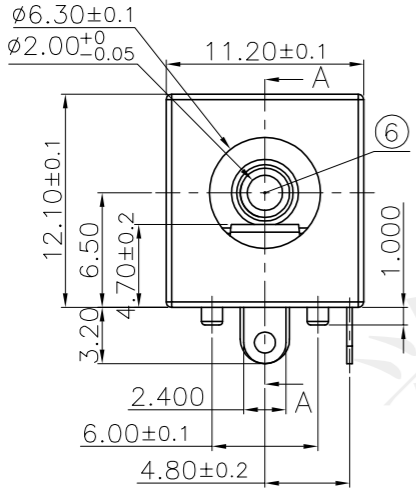

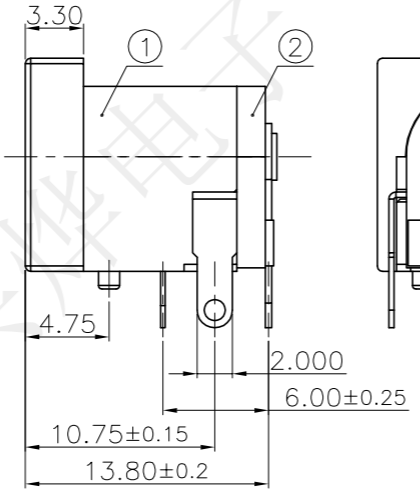





A−A



受 控 文 件

NOTES:
1.ELECTRICAL CHARACTERS:
1−1.RATING: DC 20V 3A;
1−2.CONTATCT RESISTANCE:≤30mΩ;
1−3.INSULATION RESISTANCE:≥100MΩ DC 500V;
1−4.WITHSTANDING VOLTAGE:AC 500V 1min;
1−5.LIFE:5,000 CYCLES;
2.MECHANICAL CHARACTERISTICS:
2−1.INSERTION&EXTRACTION FORCE:3~30N;
2−2.OPERATING TEMPERATURE:−30°C~+70°C;

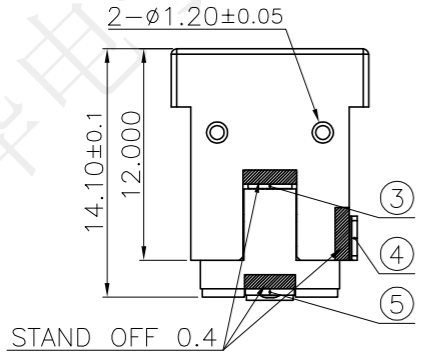

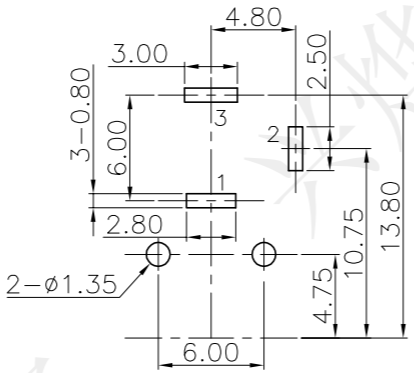

PCB HOLES(TOP VIEW)
GENERAL TOLERANCE:±0.05mm

No.	PART NAME	TER'NO.	Q'TY	MATERIAL	REMARK
⑥	PIN		1	BRASS	CuSn PLATED
⑤	TERMINAL	3	1	BRASS t=0.35	MATTE Sn PLATED
④	BREAK TERMINAL	2	1	BRASS t=0.3	MATTE Sn PLATED
③	TIP SPRING	1	1	BRONZE t=0.25	MATTE Sn PLATED
②	COVER		1	PA66 94V−0(无卤)	BLACK
①	HOUSING		1	PA66 94V−0(无卤)	BLACK

XXX	2.0	2.5
DIM"A"	ø2.0+0 −0.05	ø2.5+0 −0.05

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		
X.X	±0.30	X.° ± 2°
.XX	±0.20	.X° ± 1°
.XXX	±0.10	.XX° ±0.5°
UNITS		mm

APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞

Series Name :
Product Name : DC-062A
Part NO: DCL19057

SCALE	SHEET	REV.
1:1	1/1	A1