


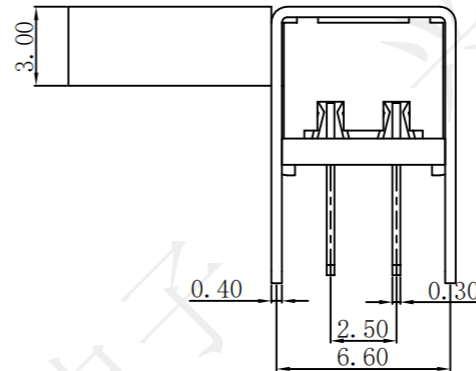
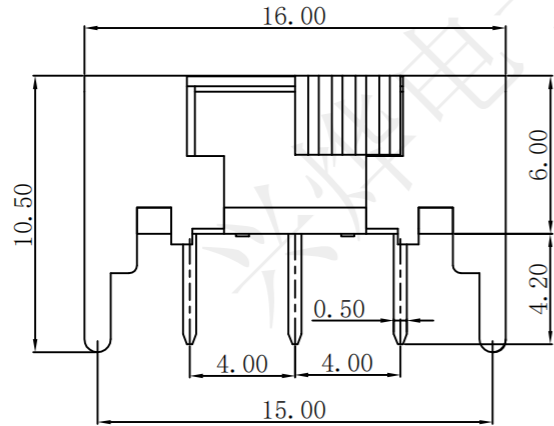


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

受控文件

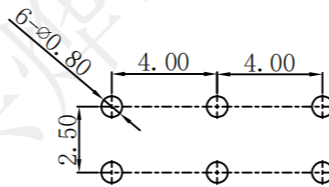

CIRCUIT

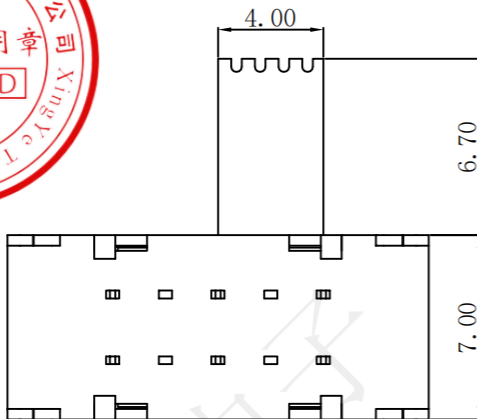

P.C.B LAYOUT  
DIMENSION TOP VIEW

**SPECIFICATION:**  
 Operating temperature:-16°C~60°C  
 Rated loading:DC 50V 0.5A  
 Contact resistance:30mΩ Max  
 Insulation resistance:100MΩ Min  
 Withstanding voltage:AC 500V (50-60Hz) /min  
 Electrical Life:5000 cycles

NO.	Pare Name	Number	Material	Remarks
4	Terminal a, b&c	6PCS	C2680	Ag
3	Bottom	1PCS	PA46	Black
2	Cover	1PCS	SUS	Natural
1	Stem	1PCS	PA66	Black

**深圳市兴烨电子有限公司**  
 Shenzhen XingYe Electronics co., Ltd

Series Name :  
 Product Description : SK22H05G7 (SK-22H02G7)

TOLERANCE		APPD: 陈爱光
X.X ±0.30	X.' ± 2'	CHED: 施立敏
.XX ±0.20	.X' ± 1'	
.XXX ±0.10	.XX' ±0.5'	DRAW: 马洪飞
UNITS	mm	

Part NO: SKQ10001

SCALE	SHEET	REV.
1:1	1/1	A1