
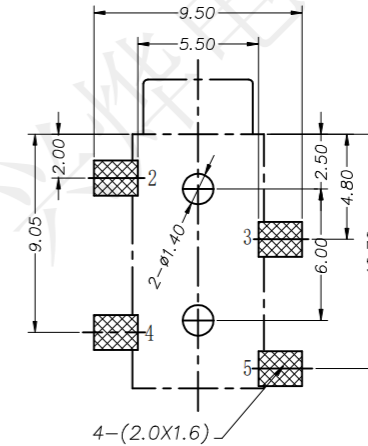






REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				



P. C. B LAYOUT TOP VIEW

受控文件

SPECIFICATION:
 Operating temperature: -30°C~70°C
 Rated loading: DC 30V 0.5A
 Contact resistance: 30mΩ Max
 Insulation resistance: 100MΩ Min
 Withstanding voltage: AC 500V (50Hz) /min
 Insertion force: 3-30N
 Pullout force: 3-30N
 Life: 5000 CYCLES

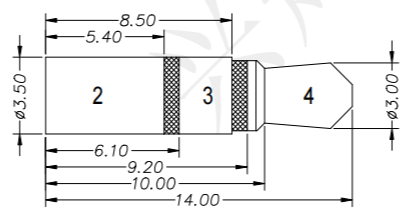

4	PJ-327C-04	盖脚	1	磷铜	0.20T	镀锡
3	PJ-327C-03	弹片	1	磷铜	0.20T	镀锡
2	PJ-327C-02	中脚	2	磷铜	0.20T	镀锡
1	PJ-327C-01	基座	1	PPA		黑色
序号	产品编号	产品名称	数量	材料	规格	处理

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE

X.X	±0.30	X.°	±2°
.XX	±0.20	.X.°	±1°
.XXX	±0.10	.XX.°	±0.5°

UNITS mm

APPD: 陈爱光
 CHED: 施立敏
 DRAW: 马洪飞

Series Name :		
Product Name : PJ-327C四脚贴带柱编带		
Part NO: PJL22115		
SCALE	SHEET	REV.
1:1	1/1	A1