
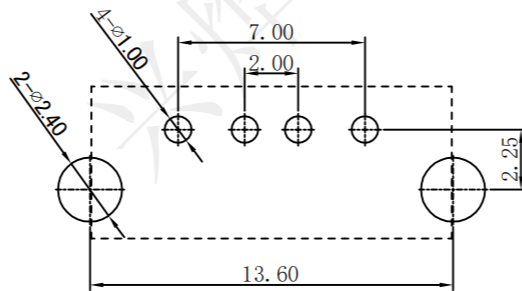
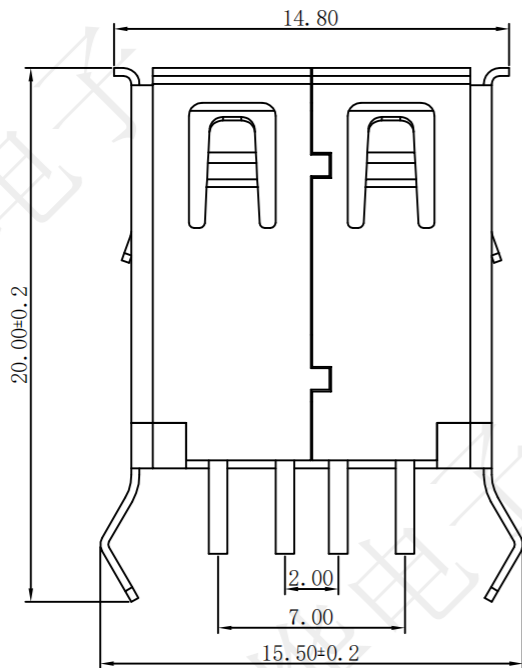
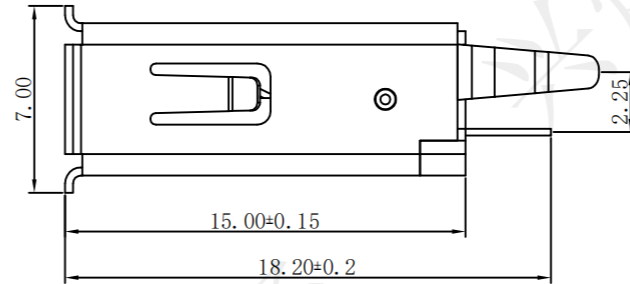


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

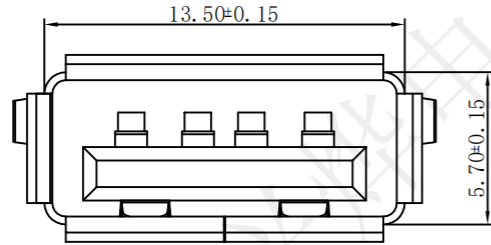

PCB LAYOUT

Specification:
 Current rating: DC 1.5A 30V
 Dielectric withstanding voltage: 500 V(ac) for 1 min.
 Contact resistance: 30 mΩ Max.
 Insulation resistance: 100 MΩ Min.
 Total mating force: 3.57 Kgf Max.
 Total unmating force: 1.0 Kgf Min.
 Temperature range: -30°C~80°C

受控文件

3	Shell	1PCS	iron	t=0.3mm
2	Contacts	4PCS	copper alloy	t=0.25mm
1	Housing	1PCS	LCP	black/UL94v-0
No.	Pare Name	Number	Material	Remarks

		Series Name :														
		Product Name : AF180度15.0白胶弯脚卷边铁														
深圳市兴烨电子有限公司 ShenZhen XingYe Electronics co., Ltd		Part NO: USBN48016														
		<table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>1:1</td> <td>1/1</td> <td>A1</td> </tr> </table>			SCALE	SHEET	REV.	1:1	1/1	A1						
SCALE	SHEET	REV.														
1:1	1/1	A1														
<table border="1"> <tr> <td colspan="2">TOLERANCE</td> <td rowspan="4">APPD: 陈爱光</td> </tr> <tr> <td>.XX ±0.30</td> <td>X.° ±2°</td> </tr> <tr> <td>.XX ±0.20</td> <td>X° ±1°</td> </tr> <tr> <td>.XXX ±0.10</td> <td>.XX° ±0.5°</td> </tr> <tr> <td>UNITS</td> <td>mm</td> <td>DRAW: 马洪飞</td> </tr> </table>		TOLERANCE		APPD: 陈爱光	.XX ±0.30	X.° ±2°	.XX ±0.20	X° ±1°	.XXX ±0.10	.XX° ±0.5°	UNITS	mm	DRAW: 马洪飞			
TOLERANCE		APPD: 陈爱光														
.XX ±0.30	X.° ±2°															
.XX ±0.20	X° ±1°															
.XXX ±0.10	.XX° ±0.5°															
UNITS	mm	DRAW: 马洪飞														