

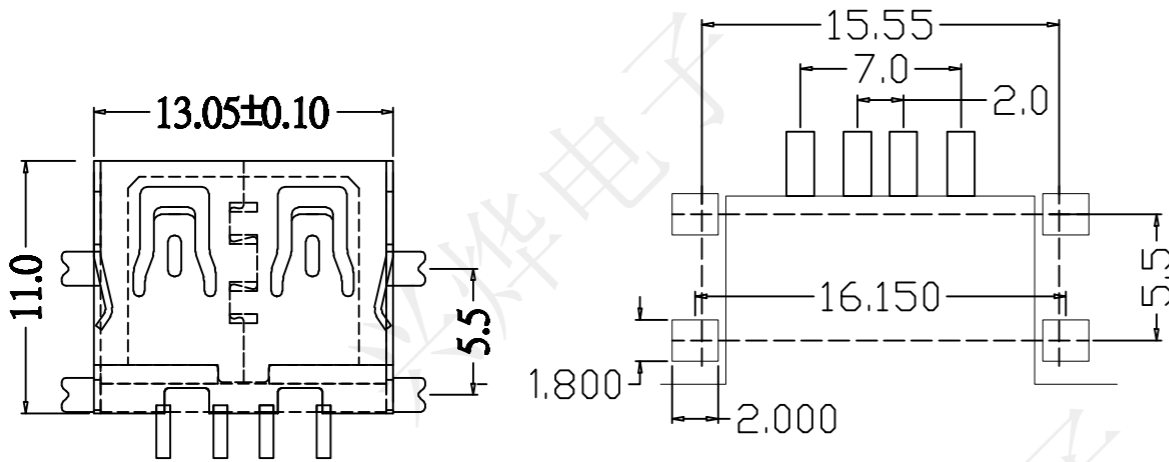
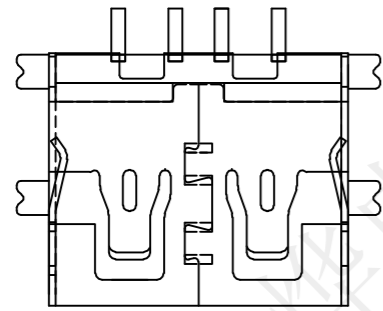


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

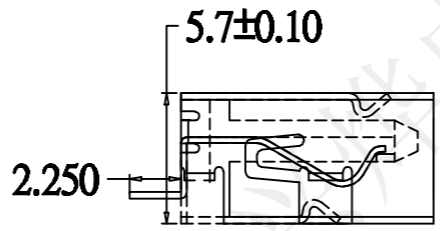

受控文件

Specification:  
 Current rating: DC 1.5A 30V  
 Dielectric withstanding voltage: 500 V(ac) for 1 min.  
 Contact resistance: 30 mΩ Max.  
 Insulation resistance: 100 MΩ Min.  
 Total mating force: 3.57 Kgf Max.  
 Total unmating force: 1.0 Kgf Min.  
 Temperature range: -30°C~80°C

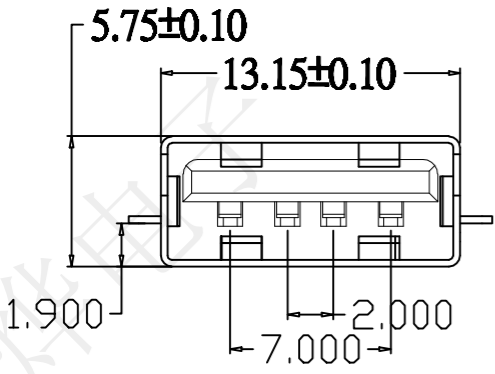

3	Shell	1PCS	copper alloy	t=0.3mm
2	Contacts	4PCS	copper alloy	t=0.25mm
1	Housing	1PCS	LCP	black/UL94v-0
No.	Pare Name	Number	Material	Remarks

		Series Name :								
		Product Description : AF11长壳体沉板直边全贴SMT1.9铁壳(小米) 黑色胶芯光面编带盐雾24H								
TOLERANCE		Part NO: USBL48034								
X.X ±0.30	X.° ±2°	APPD: 陈爱光	<table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>1:1</td> <td>1/1</td> <td>A1</td> </tr> </table>		SCALE	SHEET	REV.	1:1	1/1	A1
SCALE	SHEET	REV.								
1:1	1/1	A1								
.XX ±0.20	.X° ±1°	CHED: 施立敏								
.XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞								
UNITS	mm									