
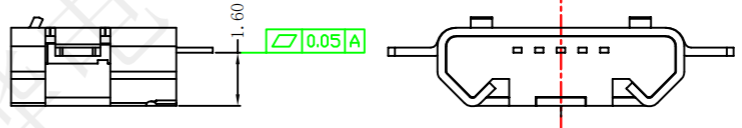
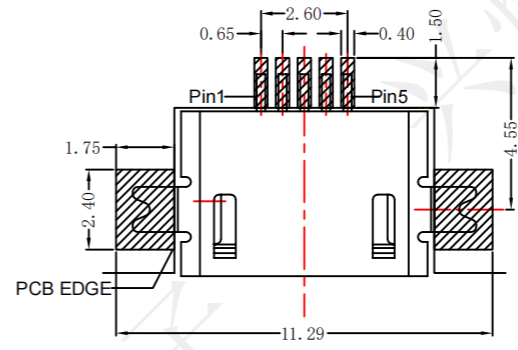


REV.	ECN NO.	DESCRIPTION	DRAW	APPD	DATE
A	---				

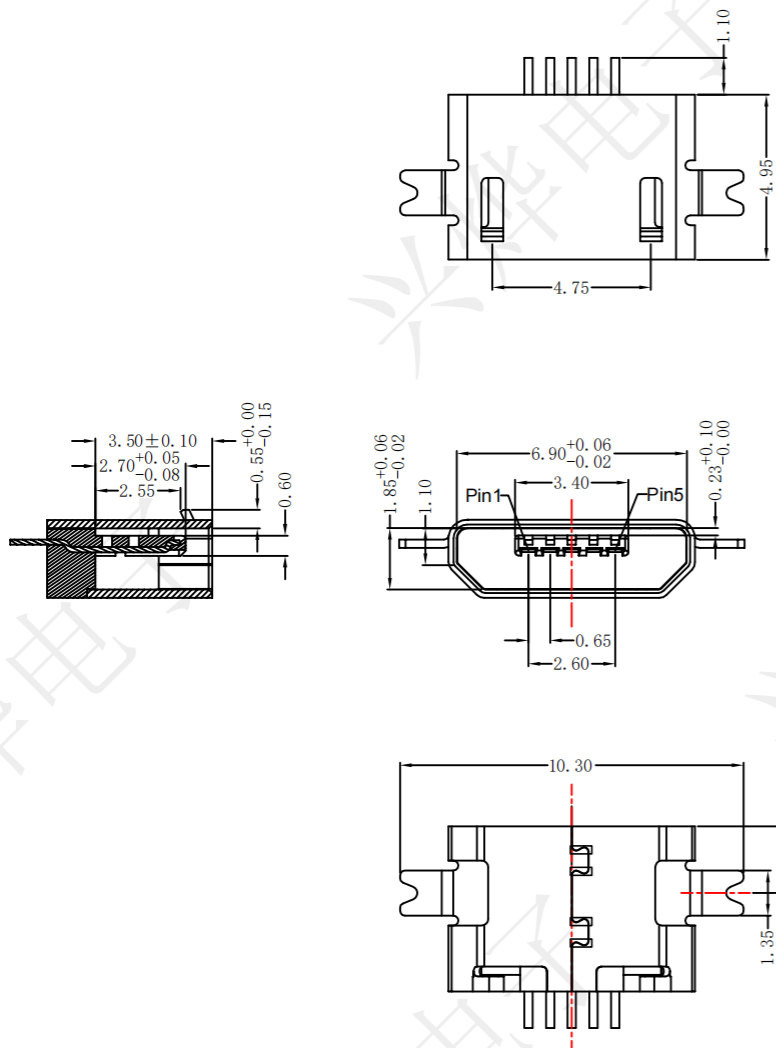

Specification:  
 Current rating: 1,5PIN 1.8A Max/2,3,4PIN 1A Max.  
 Dielectric withstanding voltage: 100 V(ac) for 1 min.  
 Contact resistance: 30 mΩ Max.  
 Insulation resistance: 100 MΩ Min.  
 Total mating force: 3.57 Kgf Max.  
 Total unmating force: 1.0 Kgf Min.  
 Temperature range: -30°C~80°C

受控文件

MKF26069	MICRO-5P沉板1.6两脚贴平口铜雾锡编带
MKF26070	MICRO-5P沉板1.6两脚贴平口铜镀镍编带
MKF26071	MICRO-5P沉板1.6两脚贴平口不锈钢雾锡编带
MKF26072	MICRO-5P沉板1.6两脚贴平口不锈钢镀镍编带

深圳市兴烨电子有限公司  
ShenZhen XingYe Electronics co., Ltd

Series Name :  
MICRO-5P沉板1.6两脚贴平口编带

Product Description :

No.	Pare Name	Number	Material	Remarks
3	Shell	1PCS	copper alloy/SUS304	t=0.25mm
2	Contacts	5PCS	copper alloy	t=0.20mm
1	Housing	1PCS	LCP	UL94v-0

TOLERANCE		
X.X	±0.30	X.° ±2°
.XX	±0.20	.X° ±1°
.XXX	±0.10	.XX° ±0.5°
UNITS	mm	

APPD: 陈爱光  
CHED: 施立敏  
DRAW: 马洪飞

Part NO:	
SCALE	1:1
SHEET	1/1
REV.	A1