REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

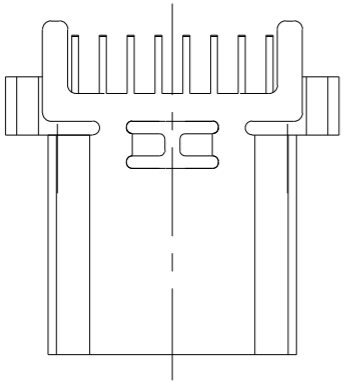

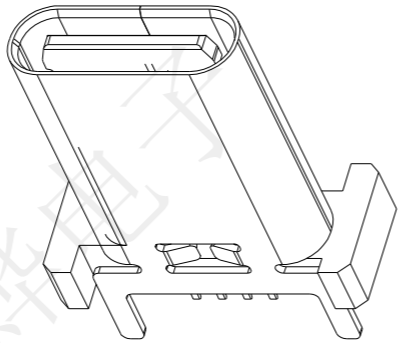



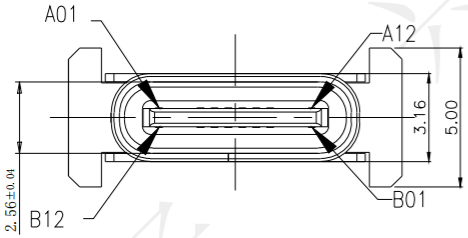

受 控 文 件

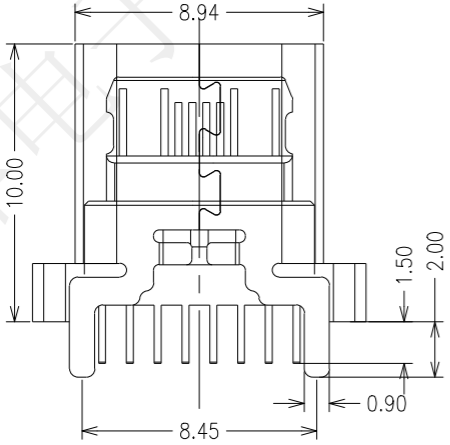

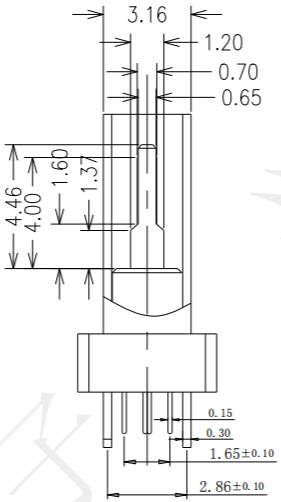

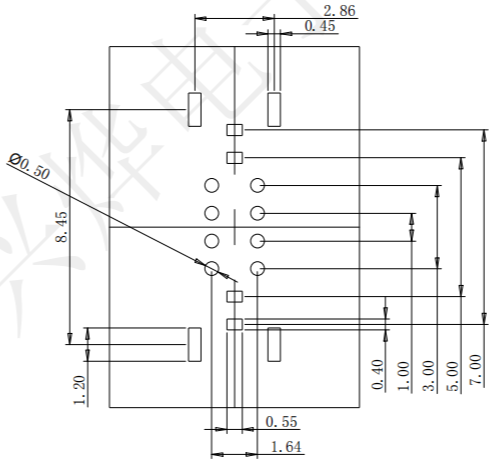

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)

TOLERANCE UNSPECIFIED ±0.05mm

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
   - 1-1. CONTACT RESISTANCE: 30mΩMAX.
   - 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
   - 1-3. INSULATION RESISTANCE: 100MΩMIN. MEASURED BY 500 VDC
2. MECHANICAL CHARACTERISTICS:
   - 2-1. INSERTION FORCE :0.5-2.0Kgf(REF.)
   - 2-2. WITHDRAWAL FORCE :0.8-2.0Kgf(REF.)
3. LIFE TEST: 10,000 CYCLES.

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NO.	Part name	Material	Remarks
4	Front shell	SUS 201	Ni/SN plated
3	Mid plate	SUS 201	
2	Contact	磷铜	Au/Ni plated
1	Housing	LCP+30%G.F	Black UL94V-0

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE			
X.X	±0.30	X°	±2°
.XX	±0.20	.X°	±1°
.XXX	±0.10	.XX°	±0.5°
UNITS		mm	

APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞

Series Name :

Product Name : TYPE-CF-16P直插H10.0加盖编带

Part NO: UCY27614

SCALE	SHEET	REV.
1:1	1/1	A1