
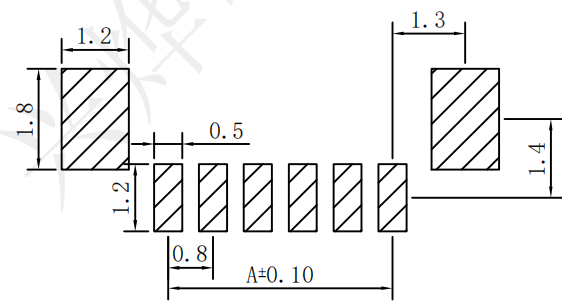
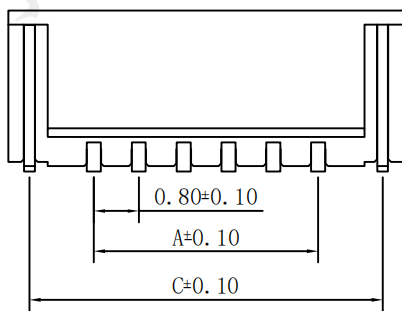



REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

**SPECIFICATIONS**

- Current Rating: 0.5A AC, DC
- Voltage Rating: 30V AC, DC
- Temperature Range: -25°C~+85°C
- Contact Resistance: 20mΩ Max
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500V AC/minute
- Material: LCP UL94V-0  
PIN brass Tin-plated  
Solder tab brass Tin-plated

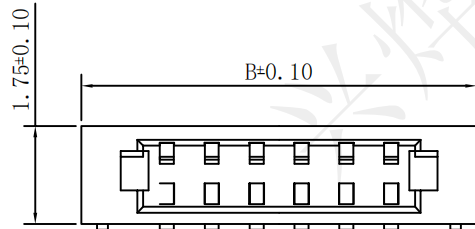

PIN数	料号	尺寸		
		A	B	C
2P	TZL24159	0.80	3.85	3.10
3P	TZL24160	1.60	4.65	3.90
4P	TZL24161	2.40	5.45	4.70
5P	TZL24162	3.20	6.25	5.50
6P	TZL24163	4.00	7.05	6.30
7P	TZL24164	4.80	7.85	7.10
8P	TZL24165	5.60	8.65	7.90
9P	TZL24166	6.40	9.45	8.70
10P	TZL24167	7.20	10.25	9.50
11P	TZL24168	8.00	11.05	10.30
12P	TZL24169	8.80	11.85	11.10
13P	TZL24170	9.60	12.65	11.90
14P	TZL24171	10.40	13.45	12.70
15P	TZL24172	11.20	14.25	13.50
16P	TZL24173	12.00	15.05	14.30
17P	TZL24174	12.80	15.85	15.10
18P	TZL24175	13.60	16.65	15.90
19P	TZL24176	14.40	17.45	16.70
20P	TZL24177	15.20	18.25	17.50



受控文件

**深圳市兴烨电子有限公司**  
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		APPD: 陈爱光 CHED: 施立敏 DRAW: 马洪飞
X.X ±0.30	X.* ± 2*	
.XX ±0.20	.X* ± 1*	
.XXX ±0.10	.XX* ±0.5*	
UNITS	mm	

Series Name : 0.8间距 立式贴片系列

Product Description :

Part NO:

SCALE	SHEET	REV.
1:1	1/1	A1