






REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

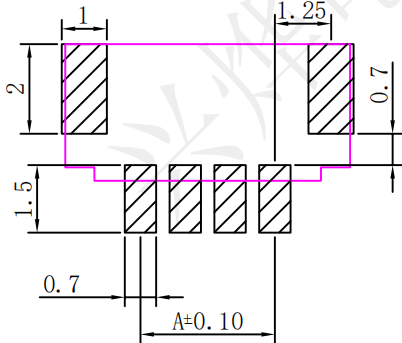

SPECIFICATIONS

- 1、 Current Rating: 0.5A AC, DC
- 2、 Voltage Rating: 50V AC, DC
- 3、 Temperature Range: -25℃~+85℃
- 4、 Contact Resistance: 20mΩ Max
- 5、 Insulation Resistance: 100MΩ Min
- 6、 Withstanding Voltage: 500V AC/minute
- 7、 Material: LCP UL94V-0
PIN brass Tin-plated
Solder tab brass Tin-plated

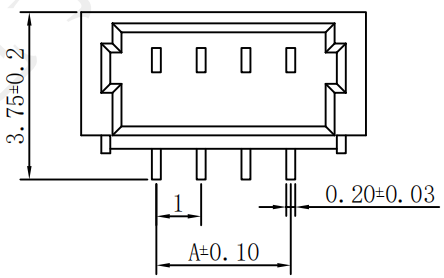

PCB LAYOUT



受控文件

PIN数	料号	尺寸		
		A	B	C
2P	TZL24129	1.0	4.35	3.25
3P	TZL24130	2.0	5.35	4.25
4P	TZL24131	3.0	6.35	5.25
5P	TZL24132	4.0	7.35	6.25
6P	TZL24133	5.0	8.35	7.25
7P	TZL24134	6.0	9.35	8.25
8P	TZL24135	7.0	10.35	9.25
9P	TZL24136	8.0	11.35	10.25
10P	TZL24137	9.0	12.35	11.25
11P	TZL24138	10.0	13.35	12.25
12P	TZL24139	11.0	14.35	13.25
13P	TZL24140	12.0	15.35	14.25
14P	TZL24141	13.0	16.35	15.25
15P	TZL24142	14.0	17.35	16.25
16P	TZL24143	15.0	18.35	17.25

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		APPD: 陈爱光 CHED: 施立敏 DRAW: 马洪飞
X.X	±0.30	
.XX	±0.20	
.XXX	±0.10	
UNITS	mm	

Series Name :
1.0间距 立式贴片系列

Product Description :

Part NO:

SCALE	SHEET	REV.
1:1	1/1	A1