
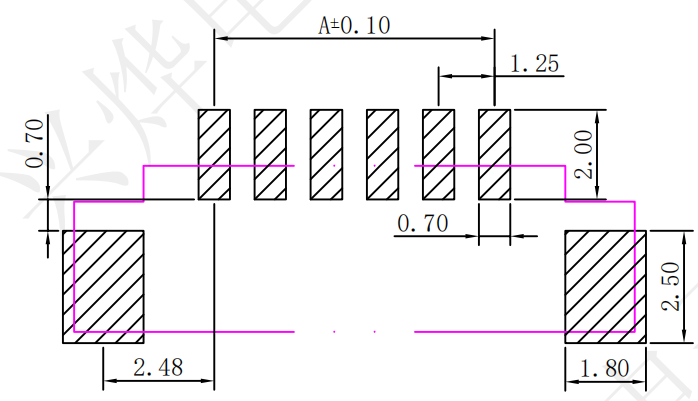
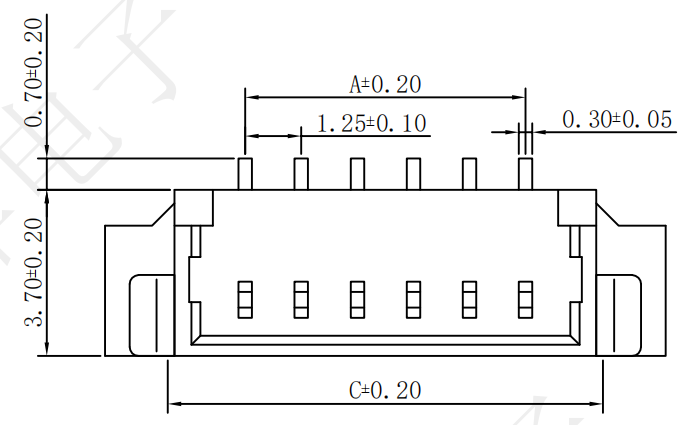




REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

受控文件

- SPECIFICATIONS**
- 1、Current Rating: 1A AC, DC
  - 2、Voltage Rating: 125V AC, DC
  - 3、Temperatuer Range: -25℃~+85℃
  - 4、Contact Resistance: 20mΩ Max
  - 5、Insulation Resistance: 500MΩ Min
  - 6、Withstanding Voltang: 500V AC/minute
  - 7、Material: LCP UL94V-0  
PIN brass Tin-plated  
Solder tad brass Tin-plated

PIN数	编号	尺寸		
		A	B	C
2P	TZL24001	1.25	7.50	4.75
3P	TZL24002	2.50	8.75	6.00
4P	TZL24003	3.75	10.00	7.25
5P	TZL24004	5.00	11.25	8.50
6P	TZL24005	6.25	12.50	9.75
7P	TZL24006	7.50	13.75	11.00
8P	TZL24007	8.75	15.00	12.25
9P	TZL24008	10.00	16.25	13.50
10P	TZL24009	11.25	17.50	14.75
11P	TZL24010	12.50	18.75	16.00
12P	TZL24011	13.75	20.00	17.25
13P	TZL24012	15.00	21.25	18.50
14P	TZL24013	16.25	22.50	19.75
15P	TZL24014	17.50	23.75	21.00
16P	TZL24015	18.75	25.00	22.25
17P	TZL24016	20.00	26.25	23.50
18P	TZL24017	21.25	27.50	24.75
19P	TZL24018	22.50	28.75	26.00
20P	TZL24019	23.75	30.00	27.25

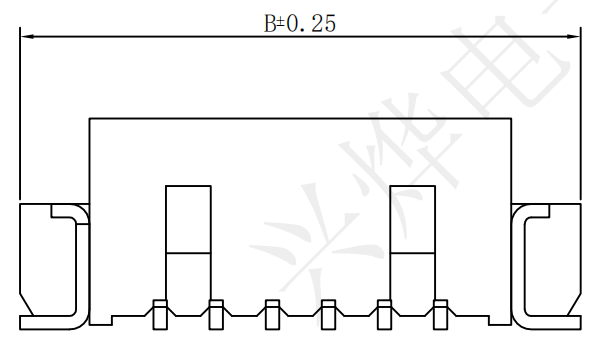

**深圳市兴烨电子有限公司**  
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		
X.X ±0.30	X.° ±2°	APPD: 陈爱光
.xx ±0.20	.X° ±1°	CHEd: 施立敏
.xxx ±0.10	.XX° ±0.5°	DRAW: 马洪飞
UNITS	mm	

Series Name : 1.25间距 立式贴片系列

Product Name :

Part NO:

SCALE	SHEET	REV.
1:1	1/1	A1