



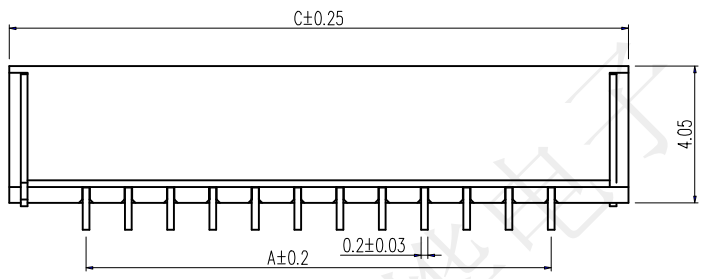



REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				




- SPECIFICATIONS**
- 1、Current Rating: 1A AC, DC
 - 2、Voltage Rating: 125V AC, DC
 - 3、Temperatuer Range: -25℃~+85℃
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 100MΩ Min
 - 6、Withstanding Voltgae: 500V AC/minute

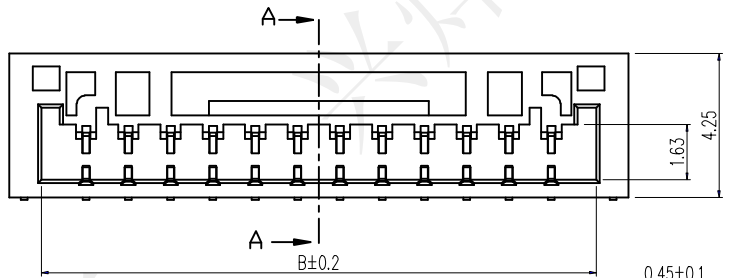

PIN数	编号	尺寸		
		A	B	C
2P	TZH24246	1.25	3.85	5.80
3P	TZH24247	2.50	5.10	7.05
4P	TZH24248	3.75	6.35	8.30
5P	TZH24249	5.00	7.60	9.55
6P	TZH24250	6.25	8.85	10.80
7P	TZH24251	7.50	10.10	12.05
8P	TZH24252	8.75	11.35	13.30
9P	TZH24253	10.00	12.60	14.55
10P	TZH24254	11.25	13.85	15.80
11P	TZH24255	12.50	15.10	17.05
12P	TZH24256	13.75	16.35	18.30
13P	TZH24257	15.00	17.60	19.55
14P	TZH24258	16.25	18.85	20.80
15P	TZH24259	17.50	20.10	22.05
16P	TZH24260	18.75	21.35	23.30
17P	TZH24261	20.00	22.60	24.55
18P	TZH24262	21.25	23.85	25.80
19P	TZH24263	22.50	25.10	27.05
20P	TZH24264	23.75	26.35	28.30

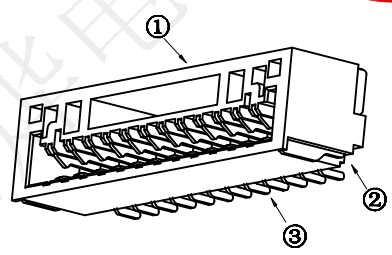

受控文件

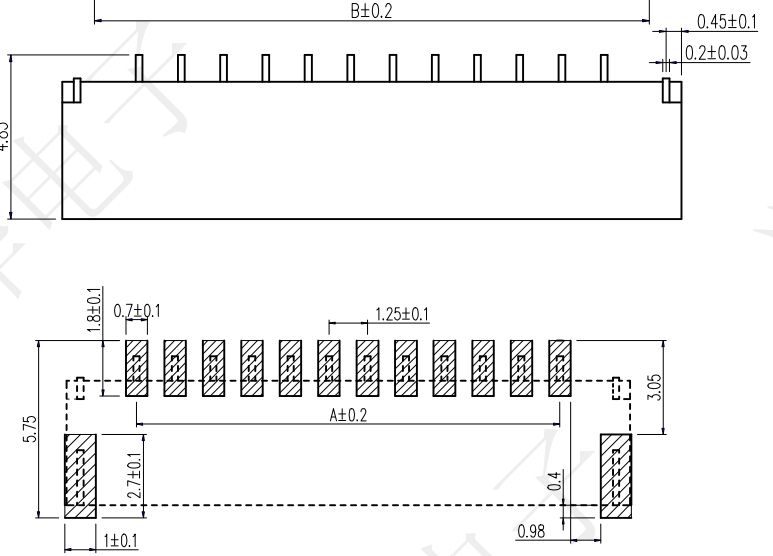

PCB LAYOUT

③	插针	2-20	磷铜	镀锡
②	弹片	2	磷铜	镀锡
①	基座	1	LCP	本色
NO	配件名称	数量	材质	备注

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

Series Name : 1.25间距 卧贴带扣系列
Product Name :

TOLERANCE		
X.X	±0.30	X.° ±2°
.xx	±0.20	.X° ±1°
.xxx	±0.10	.XX° ±0.5°
UNITS	mm	

Part NO:	SCALE	SHEET	REV.
	1:1	1/1	A1

APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞