
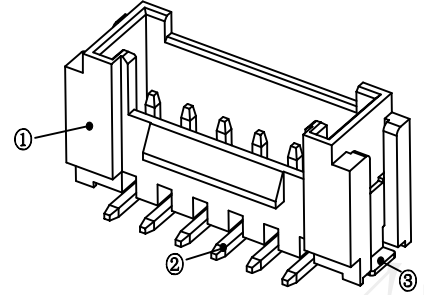
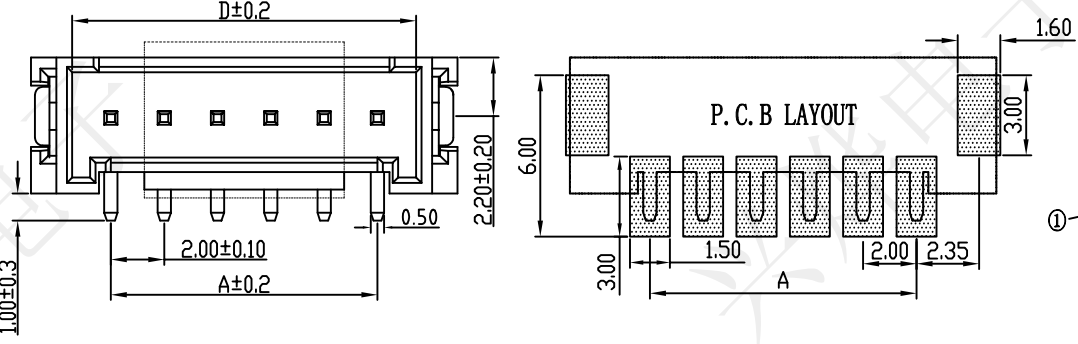


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

PIN数	料号	尺寸			
		A	B	C	D
2P	TZL24350	2.00	8.00	2.50	4.90
3P	TZL24351	4.00	10.00	2.50	6.90
4P	TZL24352	6.00	12.00	5.00	8.90
5P	TZL24353	8.00	14.00	7.00	10.90
6P	TZL24354	10.00	16.00	9.00	12.90
7P	TZL24355	12.00	18.00	11.00	14.90
8P	TZL24356	14.00	20.00	13.00	16.90
9P	TZL24357	16.00	22.00	15.00	18.90
10P	TZL24358	18.00	24.00	17.00	20.90
11P	TZL24359	20.00	26.00	19.00	22.90
12P	TZL24360	22.00	28.00	21.00	24.90
13P	TZL24361	24.00	30.00	23.00	26.90
14P	TZL24362	26.00	32.00	25.00	28.90
15P	TZL24363	28.00	34.00	27.00	30.90
16P	TZL24364	30.00	36.00	29.00	32.90

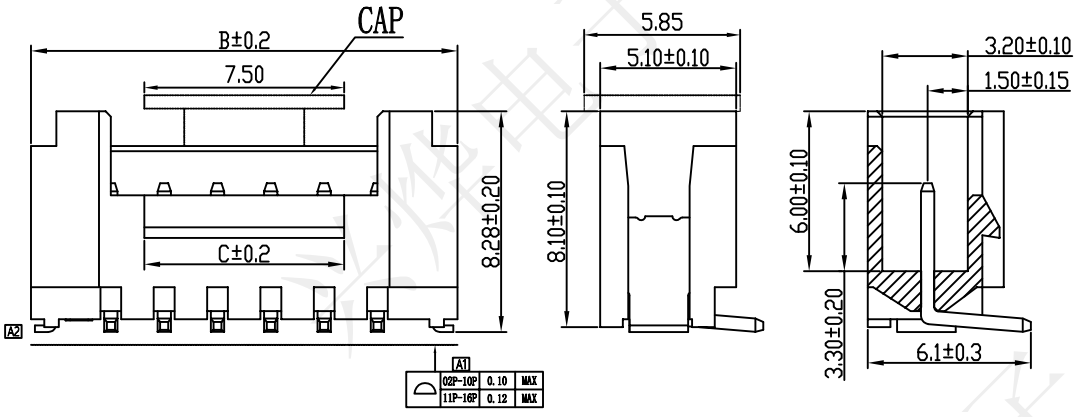

受控文件

- SPECIFICATIONS**
- Current Rating: 2A AC, DC
  - Voltage Rating: 250V AC, DC
  - Temperature Range: -25°C~+85°C
  - Contact Resistance: 20mΩ Max
  - Insulation Resistance: 800MΩ Min
  - Withstanding Voltage: 500V AC/minute
  - Material: LCP UL94V-0  
PIN brass Tin-plated  
Solder tab brass Tin-plated

		Series Name :	
		2.0-NP立贴加盖带扣编带	
TOLERANCE X.X ±0.30 X.° ±2° .XX ±0.20 X.° ±1° .XXX ±0.10 .XX° ±0.5° UNITS mm		Product Description :	
		Part NO:	
APPD: 姚人凤			SCALE
CHED: 施立敏			SHEET
DRAW: 马洪飞		REV.	
		1:1	A1