
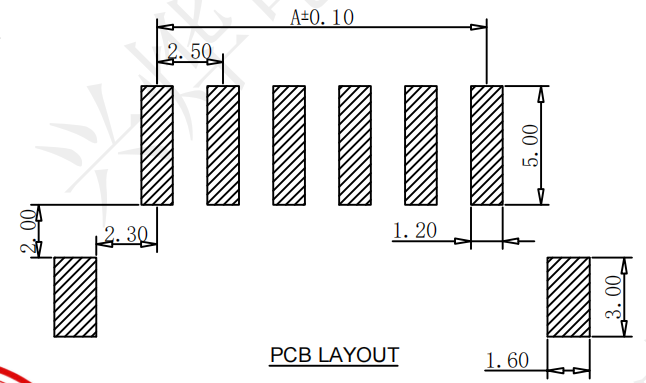
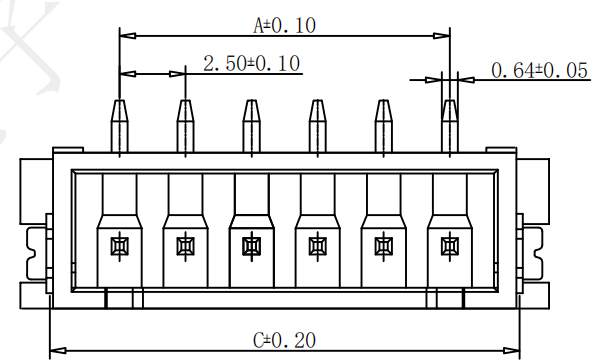



REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

受控文件

- SPECIFICATIONS**
- 1、 Current Rating: 3A AC, DC
 - 2、 Voltage Rating: 250V AC, DC
 - 3、 Temperatur Range: -25 °C~+85 °C
 - 4、 Contact Resistance: 20mΩ Max
 - 5、 Insulation Resistance: 1000MΩ Min
 - 6、 Withstanding Voltang: 500V AC/minute
 - 7、 Material: LCP UL94V-0
- PIN brass Tin-plated
Solder tad brass Tin-plated

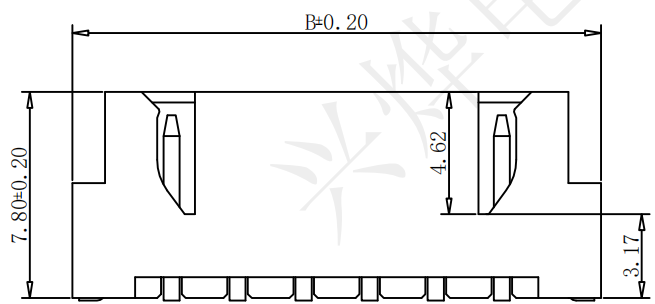

PIN数	料号	尺寸		
		A	B	C
2P	TZL24099	2.5	10.0	7.8
3P	TZL24100	5.0	12.5	10.3
4P	TZL24101	7.5	15.0	12.8
5P	TZL24102	10.0	17.5	15.3
6P	TZL24103	12.5	20.0	17.8
7P	TZL24104	15.0	22.5	20.3
8P	TZL24105	17.5	25.0	22.8
9P	TZL24106	20.0	27.5	25.3
10P	TZL24107	22.5	30.0	27.8
11P	TZL24108	25.0	32.5	30.3
12P	TZL24109	27.5	35.0	32.8
13P	TZL24110	30.0	37.5	35.3
14P	TZL24111	32.5	40.0	37.8
15P	TZL24112	35.0	42.5	40.3
16P	TZL24113	37.5	45.0	42.8



深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		APPD: 姚人凤 CHED: 施立敏 DRAW: 马洪飞
X.X	±0.30	
.XX	±0.20	
.XXX	±0.10	
UNITS	mm	

Series Name : 2.5间距 立式贴片系列

Product Pescription :

Part N0:

SCALE	SHEET	REV.
1:1	1/1	A1