

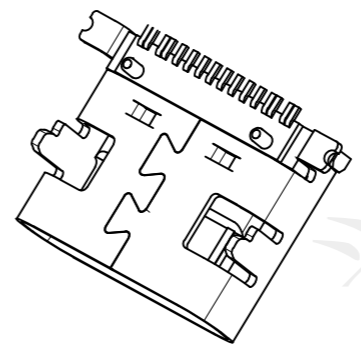

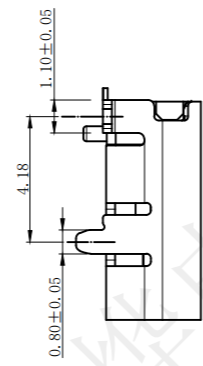


受控文件



PTION		DPAW	APPD	DATE
-------	--	------	------	------

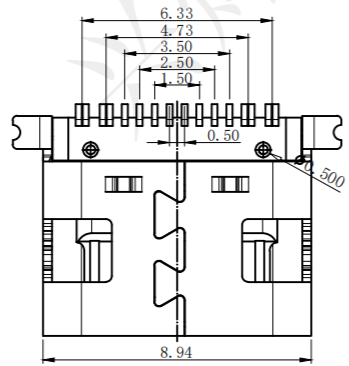

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



- NOTES:
- MECHANICAL: MATING FORCE: 5-20N .
UNMATING FORCE: 8-20N .
DURABILITY: 10000 CYCLES MIN.
 - ELECTRICAL:
CURRENT: 5.0A MAX
VOLTAGE: 20V MAX
WITHSTANDING VOLTAGE: 100V AC
CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
50 mΩ MAX AFTER 10000 CYCLES
 - ENVIRONMENTAL:
OPERATING TEMPERATURE RANGE -30° C ~ +80° C
 - Salt Spray: 48H

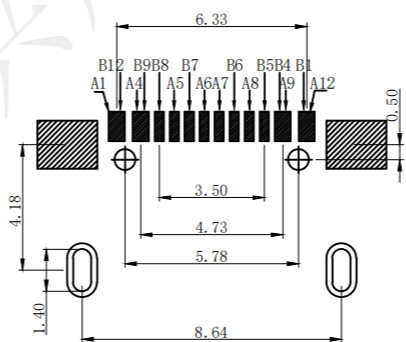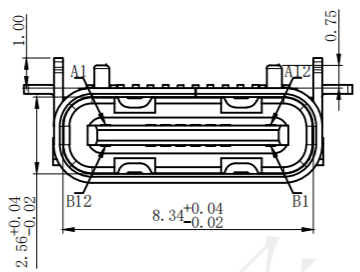

BOM		
序号	名称	材料规格
1	Terminal	C7025 TM02 T=0.15mm 电镀全金 Au:GF Ni:50u"
2	Terminal	C7025 TM02 T=0.15mm 电镀全金 Au:GF Ni:50u"
3	Molding 1	LCP+30%G. F黑色 UL94 V-0
4	Molding 2	LCP+30%G. F黑色 UL94 V-0
5	Molding 3	LCP+30%G. F黑色 UL94 V-0
6	Shell	SUS301 1/2H T=0.30mm Ni:50u"

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

Series Name :
Product Name :
TYPE-CF-16P板上前插后贴L7.35

TOLERANCE	
X.X ±0.30	X.° ±2°
.XX ±0.20	.X° ±1°
.XXX ±0.10	.XX° ±0.5°
UNITS	mm

Part NO: UCM27545

SCALE	SHEET	REV.
1:1	1/1	A1

APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞