
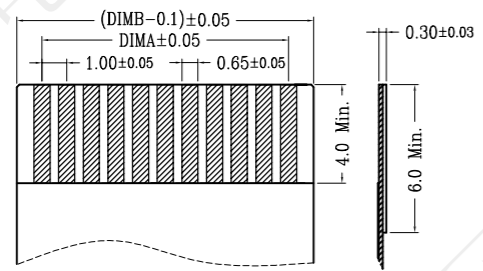
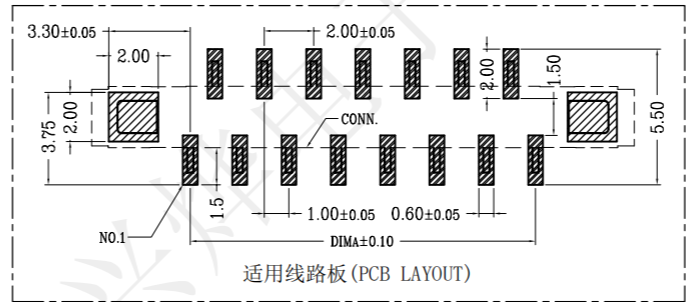
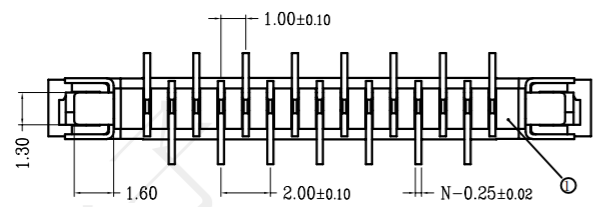
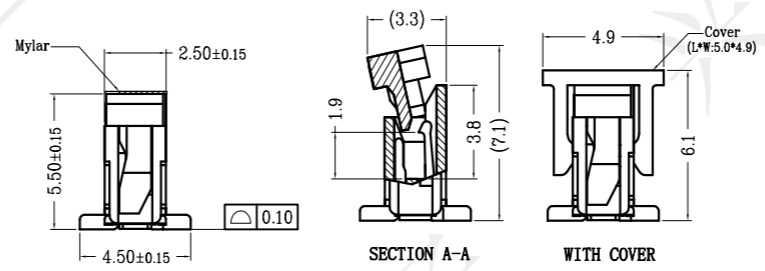
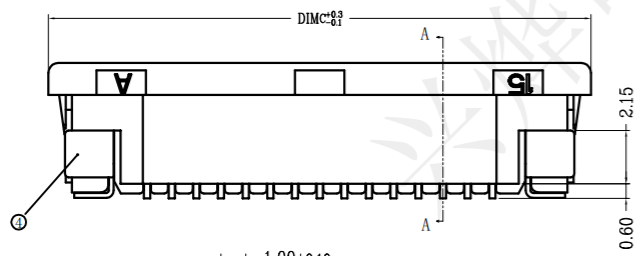
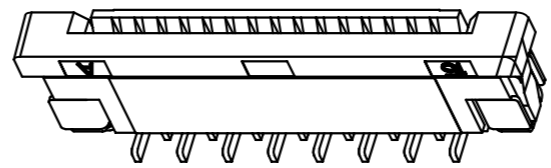


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

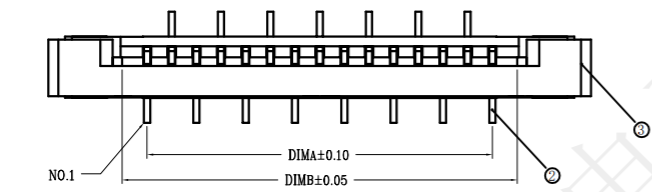

适用扁平线 (Applicable Flat Cable)

料号	P位	A	B	C
FCW24750	04	3.00	5.03	11.10
FCW24751	05	4.00	6.03	12.10
FCW24752	06	5.00	7.03	13.10
FCW24753	07	6.00	8.03	14.10
FCW24754	08	7.00	9.03	15.10
FCW24755	09	8.00	10.03	16.10
FCW24756	10	9.00	11.03	17.10
FCW24757	11	10.00	12.03	18.10
FCW24758	12	11.00	13.03	19.10
FCW24759	13	12.00	14.03	20.10
FCW24760	14	13.00	15.03	21.10
FCW24761	15	14.00	16.03	22.10
FCW24762	16	15.00	17.03	23.10
FCW24763	17	16.00	18.03	24.10
FCW24764	18	17.00	19.03	25.10
FCW24765	19	18.00	20.03	26.10
FCW24766	20	19.00	21.03	27.10
FCW24767	21	20.00	22.03	28.10
FCW24768	22	21.00	23.03	29.10
FCW24769	23	22.00	24.03	30.10
FCW24770	24	23.00	25.03	31.10
FCW24771	25	24.00	26.03	32.10
FCW24772	26	25.00	27.03	33.10
FCW24773	27	26.00	28.03	34.10
FCW24774	28	27.00	29.03	35.10
FCW24775	29	28.00	30.03	36.10
FCW24776	30	29.00	31.03	37.10
FCW24777	31	30.00	32.03	38.10
FCW24778	32	31.00	33.03	39.10
FCW24779	33	32.00	34.03	40.10
FCW24780	34	33.00	35.03	41.10
FCW24781	35	34.00	36.03	42.10
FCW24782	36	35.00	37.03	43.10
FCW24783	37	36.00	38.03	44.10
FCW24784	38	37.00	39.03	45.10
FCW24785	39	38.00	40.03	46.10
FCW24786	40	39.00	41.03	47.10

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C~85° C.
3. 额定电压: 50V, AC/DC(等效).
4. 接触电阻: ≤0.03Ω.
5. 绝缘电阻: ≥500MΩ

受控文件



序号	品名	材质
①	1.0 K型胶芯 (H2.5)	LCP UL94V-0 本色
②	1.0 K型立式端子 (H5.5)	铜合金/表面镀锡
③	1.0 K型卧式后盖 (H2.5)	LCP UL94V-0 黑色
④	1.0 K型立式焊片 (H5.5)	铜合金/表面镀锡

**深圳市兴烨电子有限公司**  
Shenzhen XingYe Electronics co., Ltd

TOLERANCE		
.XX	±0.30	X.° ±2°
.XX	±0.20	.X° ±1°
.XXX	±0.10	.XX° ±0.5°
UNITS	mm	

Series Name:	1.0-nP正位立贴		
Product Name:			
Part NO:			
	SCALE	SHEET	REV.
	1:1	1/1	A1