

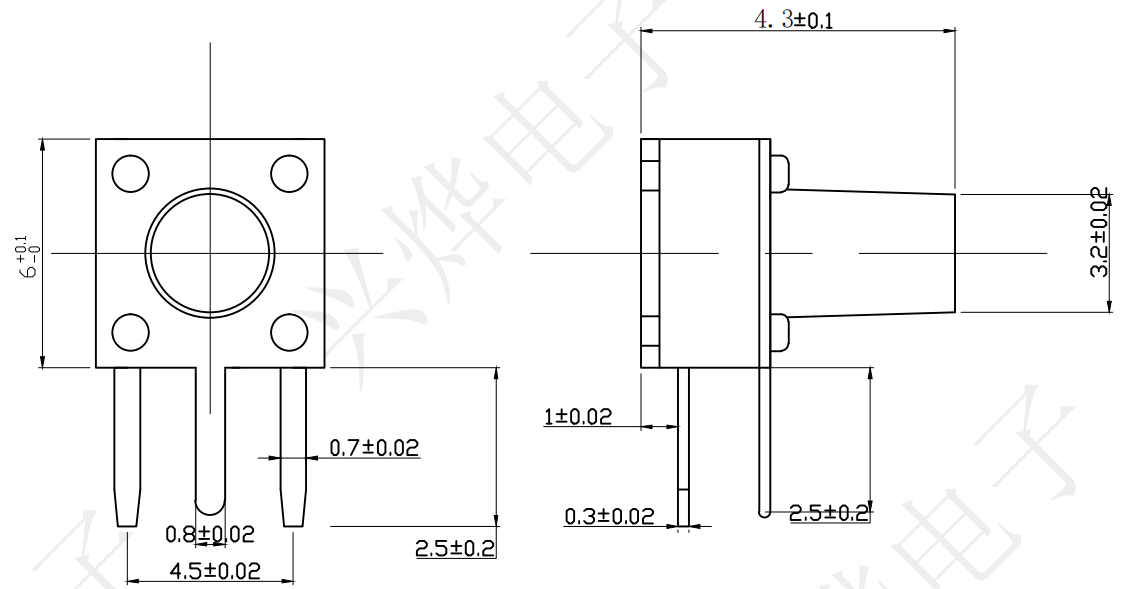


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

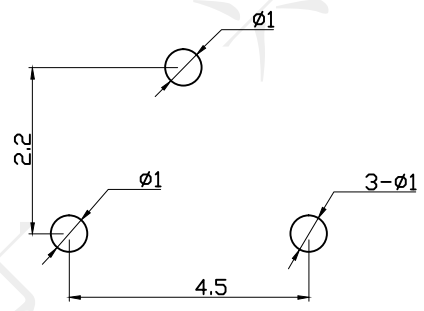

受控文件

SPECIFICATION:
 Operating temperature: -25℃~70℃
 Rated loading: AC 12V 50mA
 Contact resistance: 100mΩ Max
 Insulation resistance: 100MΩ Min
 Withstanding voltage: AC 250V (50Hz) /min
 Operating force: 160±50gf Max
 Electrical Life: 50000 cycles



5	按钮	1PCS	PPA	
4	盖片	1PCS	铁	镀锡
3	弹片	1PCS	不锈钢	
2	底座	1PCS	PPA	
1	接线片	1PCS	黄铜	镀银
序列号	名称	数量	材料	备注

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

Series Name :

Product Description :
6*6*4.3边三脚不锈钢弹片160G脚长2.5铁盖编带

Part NO: TSG22269

TOLERANCE		APPD: 陈爱光 CHED: 施立敏 DRAW: 马洪飞	SCALE: 1:1	SHEET: 1/1	REV: A1
XX	±0.30				
X.°	±2°				
.XX	±0.20				
.XXX	±0.10				
UNITS	mm				