


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

Dimensions (unit:mm)

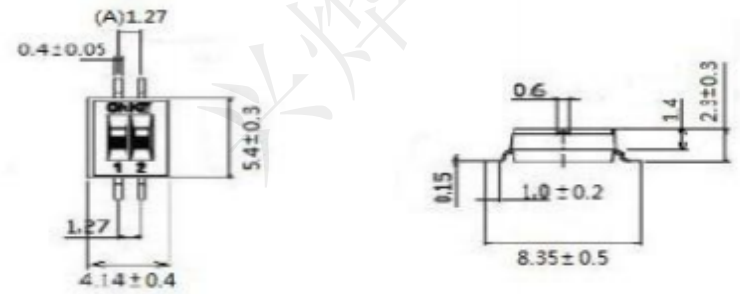

其他没标公差均为 ± 0.1

NOTES:

1. Specification:

- 1>. Operating force:1000gf Max
- 2>. Operating Temperature:-30 ° to+85 °
- 3>. Storage Temperature:-40 ° to+85 °
- 3>. Mechanical Lire:3000cycles minimum


2. PLATING

GOLD FLASH 1u"(min) SOLDERTALL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.



受控文件

P.C.B.Layout (unit:mm)



Circuitry



Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movadic	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal>Contact	Brass	3u"Gold

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

Series Name :
Product Description :
拨码开关1.27-2P

TOLERANCE		APPD: 陈爱光 CHED: 施立敏 DRAW: 马洪飞
XX ±0.30	X.° ±2°	
.XX ±0.20	.X° ±1°	
.XXX ±0.10	.XX° ±0.5°	
UNITS	mm	

Part NO: **AKK20020**

	SCALE	SHEET	REV.
	1:1	1/1	A1