

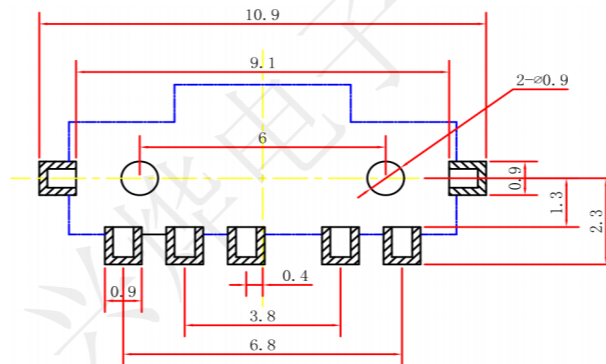
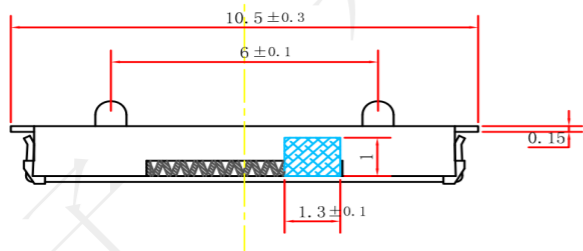
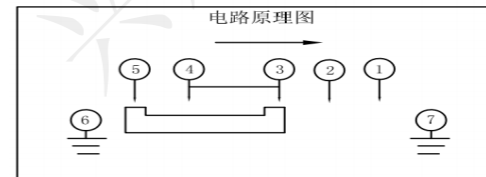

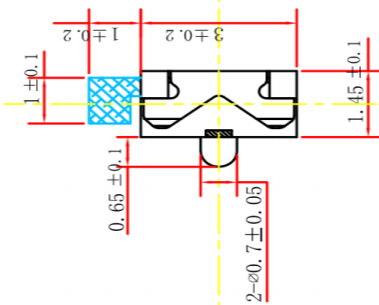


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

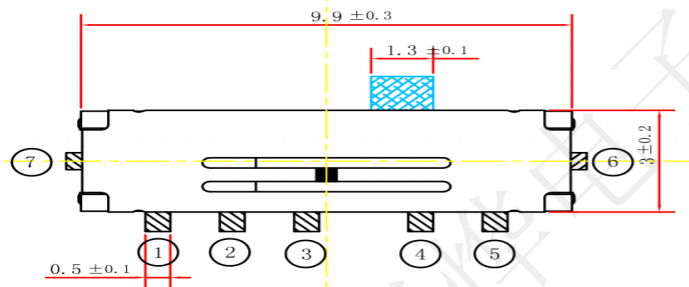

受控文件

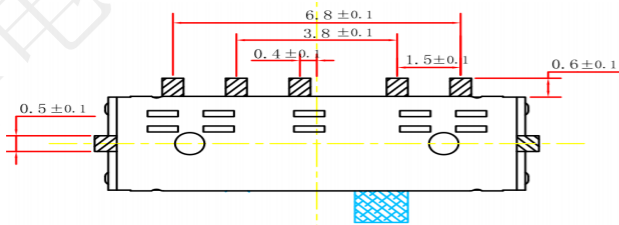

项 目	规 格
额定范围:	0.1A DC12V
绝缘电阻:	100mΩ min(DC100V)
耐压强度:	AC500V (50/60Hz foy 1 minute)
机械寿命:	10,000 cycles
操作温度:	-10℃ ~ +60℃
操作力度:	200gf ± 100gf
材料属性:	环保 (SGS)

NO.	PARTS	MATERIAL	QTY.	FINISHING
5	TERMINAL a,b&c	C2680	6	Ag
4	CONTACT	C5210	2	Ag
3	BOTTOM	PA46	1	BLACK
2	COVER	SUS	1	NATURAL
1	STEM	PA66	1	BLACK

深圳市兴烨电子有限公司
Shenzhen XingYe Electronics co., Ltd

TOLERANCE	
X.X ±0.30	X.' ± 2'
.XX ±0.20	.X' ± 1'
.XXX ±0.10	.XX' ±0.5'
UNITS	mm

APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞

Series Name:			
Product Prescription:	MSK-13C06mini七脚贴片左复位带柱编带		
Part NO:	SKL20048		
	SCALE	SHEET	REV.
	1:1	1/1	A1

1 2 3 4 5 6 7